

# CONCRETE INLET (WIDTH MAY VARY BASED ON SITE CONDITIONS) DISTANCE MAY VARY BASED ON SITE CONDITIONS BACK OF CURB INSURMOUNTABLE CURB FACE INSURMOUNTABLE CURB FACE POSITION RAIN GUARDIAN BUNKER SO PRIMARY OUTLET ALIGNS WITH TOE OF BASIN SIDE SLOPE TO AVOID SOIL INTERFERENCE WITH FILTER 4/3-1/4\*

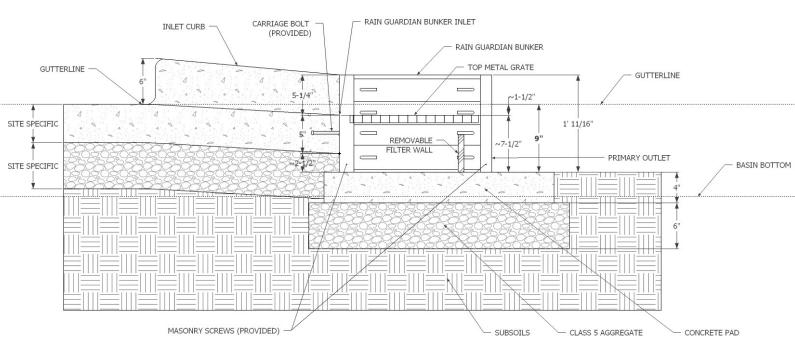


### PLAN VIEW NOTES

- 1. INLET WIDTH AND DISTANCE BETWEEN BACK OF CURB AND RAIN GUARDIAN BUNKER MAY VARY WITH SITE CONDITIONS. INSTALLATION FLUSH WITH THE BACK OF THE CURB CAN ALSO BE COMPLETED WITH THE RAIN GUARDIAN BUNKER.
- 2. CONCRETE PAD EXTENDS BEYOND THE FILTER WALL OF THE RAIN GUARDIAN BUNKER TO SERVE AS A SPLASH DISSIPATOR.

### **INSTALLED VIEWS**





### **CROSS-SECTION VIEW NOTES**

- 1. THE TOP OF THE CLASS 5 BASE (COMPACTED TO 95% STANDARD PROCTOR) IS PRECISELY 1'1" BELOW THE GUTTERLINE ELEVATION.
- 2. THE TOP OF THE CONCRETE PAD IS PRECISELY 9" BELOW THE GUTTERLINE.

### **INSTALLATION NOTES**

- 1. INSTALL THE CONCRETE PAD WITH A 1' 10" OFFSET FROM THE BACK OF THE CURB TO ACCOMMODATE THE CONCRETE INLET. THIS DISTANCE MAY VARY BASED ON SITE CONDITIONS, BUT CONSIDERATIONS SHOULD INCLUDE SLOPE OF THE INLET AND BASIN SIDE SLOPES ADJACENT TO THE RAIN GUARDIAN BUNKER. POSITION RAIN GUARDIAN BUNKER SO PRIMARY OUTLET ALIGNS WITH TOE OF BASIN SIDE SLOPE TO AVOID SOIL INTERFERENCE WITH REMOVABLE FILTER WALL. THE CONCRETE PAD SHOULD BE REINFORCED WITH REBAR.
- 2. EXCAVATE 1' 7" BELOW THE GUTTERLINE ELEVATION (I.E. THE BIO-RETENTION OVERFLOW ELEVATION) TO ACCOMMODATE THE 9" PONDING DEPTH, 6" CLASS 5 AGGREGATE, AND 4" CONCRETE PAD TO WHICH THE RAIN GUARDIAN BUNKER WILL BE SECURED. THEREFORE, THE TOP OF THE FINISHED CONCRETE PAD IS PRECISELY 9" BELOW THE GUTTERLINE ELEVATION. THE TOP OF THE RAIN GUARDIAN BUNKER METAL GRATE WILL BE 7-1/2" ABOVE THE TOP OF THE CONCRETE PAD AND 1-1/2" BELOW THE GUTTERLINE ELEVATION TO ACCOMMODATE A SLOPED INLET FROM THE GUTTER TO THE RAIN GUARDIAN BUNKER.
- 3. THE RAIN GUARDIAN BUNKER SHOULD BE POSITIONED 2" FROM THE EDGE OF THE CONCRETE PAD CLOSEST TO THE BACK OF THE CURB. THEREFORE, THE RAIN GUARDIAN BUNKER WILL BE 2' FROM THE BACK OF THE CURB.
- 4. USING THE PILOT HOLE IN EACH OF THE FOUR CORNER POSTS, PREDRILL 5/32" HOLES INTO THE CONCRETE PAD WITH A 4-1/2" MASONRY BIT AND HAMMER DRILL.
- 5. SECURE RAIN GUARDIAN BUNKER TO CONCRETE PAD WITH FOUR 3/16" X 2-3/4" MASONRY SCREWS (PROVIDED).
- 6. INSTALL FRAMING FOR INLET BETWEEN RAIN GUARDIAN BUNKER AND BACK OF CURB. TOP ELEVATIONS OF THE FRAMING SHOULD MATCH THE TOP OF THE CURB ON THE STREET SIDE AND THE TOP OF THE RAIN GUARDIAN BUNKER ON THE BIORETENTION SIDE.
- 7. WHEN POURING THE CONCRETE INLET, ENSURE THE CARRIAGE BOLTS ON THE RAIN GUARDIAN BUNKER ARE SURROUNDED BY AT LEAST 2" OF CONCRETE ON ALL SIDES.
- 8. SIDE CURBS OF THE POURED INLET MUST HAVE AN INSURMOUNT-ABLE PROFILE TO PREVENT WATER FLOW FROM OVERTOPPING THE DOWNSTREAM SIDE OF THE INLET.
- 9. WRAP CABLE THROUGH TOP METAL GRATE AND SECURE WITH PROVIDED CLAMP. ENSURE SUFFICIENT SLACK EXISTS IN CABLE TO ALLOW FOR GRATE REMOVAL AND PLACEMENT IN CONCRETE INLET DURING CLEANING. REMOVABLE FILTER WALL SHOULD BE INSTALLED WITH FILTER FABRIC FACING THE RAIN GUARDIAN BUNKER INLET.

# RAIN GARDIAN U.S. PATENT NO. 8,501.016

## PRETREATMENT FOR BIORETENTION

ain Gardens • Swales • Filtration Basins • Infiltration Basins

www.RainGuardian.biz

NOTE: THE 9" RAIN GUARDIAN
BUNKER IS A NON-STANDARD
PRODUCT AND REQUIRES
ADVANCED NOTICE WHEN
ORDERING.

PRETREATMENT CHAMBER
BIORETENTION PONDING DEPTH: 9"
TYPICAL DETAIL

REVISION HISTORY				
REV	ВУ	DATE	DESCRIPTION	
Α	MDH	12/1/15	BUNKER—9"	
				,
SCALE		VARIABLE		
U.S. PATENT		8,501,016		
		•		



Anoka Conservation District 1318 McKay Dr. NE, Suite 300 Ham Lake, MN 55304 763-434-2030