

# Rainier Fiber™



## **Rainier Fiber™ Plus Tacifier** **Premium Wood Fiber Mulch Plus Tacifier**

### **DESCRIPTION**

*Rainier Fiber™ Plus Tacifier* is 100% virgin wood fiber mulch for use in hydraulic planting with the extra holding power of a tacifier. It is premium quality wood mulch, to which a high grade organic tacifier is added to enhance erosion protection. The fiber is consistent in size and texture for the most optimum performance.

When applied over the soil surface, the fibers tend to twist and lock with each other as they dry. With tacifier, the holding power of the fiber to the soil is stronger, thus providing increased erosion protection. The tacifier also holds the seeds in place and gives extra lubricity to the slurry, which makes pumping and application easier.

### **ADVANTAGES**

- Stronger bonding of the fibers to the soil. Increased erosion protection.
- Pre-mixed blended tacifier disperses into slurry quickly for fast hydration.
- No gum balls as compared to adding tacifier directly in the tank.
- Extra lubricity from the tacifier makes the slurry pump easier.
- Eliminates the mess, waste and irritating dust that results from adding tacifier separately.
- All in one bag. Saves time in handling and mixing.

The manufacturing starts with clean, western softwood chips in which the fibers are separated in a high pressure defibration process that includes high temperature 177°C (350°F) steam and rubbing action. The process reduces the chips to long, soft fibers. This combination of selected softwood chips and thermo-mechanical refining produces the finest wood fiber mulch for hydroseeding and erosion control. In addition, the extreme heat and use of clean wood chips assures a sterile fiber to aid germination and growth of seed, stolons and sprigs.

*Rainier Fiber™ Plus Tacifier* is fast to load in hydroseeding equipment from easy to handle plastic bags. The fibers are sized for maximum loading in a tank, and they make a homogeneous slurry of water, seed and fertilizer. The fibers remain in suspension during agitation and pumping, and the slurry does not dewater when doing hose work.

The green color makes the mixed slurry visible during application, even at maximum pumping distances. This allows the operator to apply an even application of material over the soil surface. The green dye added to the fiber during manufacture is non-toxic to fish or animal life. Caution should be used when spraying near concrete or buildings to prevent overspray from temporarily staining these items.

### **PRODUCT FEATURES**

- Made from fresh cut, clean, western softwood chips.
- Fiber stays in uniform suspension and blends with seed and fertilizer.
- High loading and goes into slurry quickly.
- Forms stable mulching mat and holds the seed in place.
- Provides favorable micro-climate for faster germination.
- Helps establish grasses for erosion control, as well as fine turf.
- Green dye assists in even application. Dye is non-toxic to fish or animals.
- Mulch has no growth inhibiting factors.
- High temperature 177°C (350°F) steam processing sterilizes the fiber and kills all seeds.
- No viable noxious or other weed and plant seeds in the mulch. All seeds are sterilized.
- Fibers decompose after plants have established.

**PRODUCT SPECIFICATIONS**


*Rainier Fiber™ Plus Tacifier* is manufactured to specific fiber sizes in a heat-controlled environment to provide best job-site performance. Clean wood chips are softened by high temperature 177° C (350° F) steam, and the pressurized thermo-mechanical refining process produces long, soft fibers. The resulting fibers have physical features that tend to intertwine with each other forming a protective mulching mat.

Moisture content .....	(ASTM D-644) .....	12.0%±3.0%
Organic matter (oven dried basis).....	(ASTM D-586).....	99.3%±0.2%
Ash content (oven dried basis).....	(ASTM D-586).....	0.7%±0.2%
pH @ 3% concentration.....	(EPA SW846 9045).....	4.5±0.5
Water holding capacity .....	(ASTM D-7367).....	1,350% min
Color.....		Green
Tacifier content.....	(based on total weight).....	3.0%
Material Safety Data Class .....		Naturally occurring material

*Rainier Fiber™ Plus Tacifier* is compressed and sealed in heavy duty plastic bags with a UV inhibitor. Each easy to open bag weighs 50 lbs (22.7 kg) net and measures 10 x 19 x 29 inches. There are 40 bags/pallet, which makes into a tight stretch-wrapped unit. Load rates are up to 25 bags per 3000 gallons of water or 50 lbs of mulch per 120 gallons of water. These rates may vary depending on the machine. Instructions are on each bag.

**COVERAGE**

Green dye is added to help the applicator maintain uniform coverage during application. FMI recommends a minimum application of 1,800 pounds per acre on flat to 5H:1V slopes. For 4H:1V slopes use a heavier application.

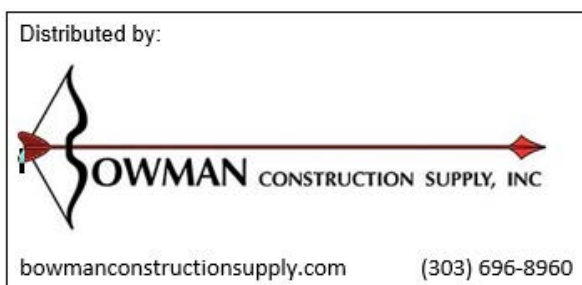

**FOR MORE INFORMATION PLEASE CONTACT:**

Fiber Marketing International, Inc.  
 11111 EAST TRENT  
 SPOKANE, WA 99206  
 800-426-6002 or 509-927-4071  
 509-927-2330 FAX  
 www.fibermarketing.com

Distributed by: Bowman Construction Supply, 10801 E. 54th Avenue, Denver, CO 80239; Phone: (303) 696-8960